

B series ultra thin SMD LED flood light



Product description

- Streamline design classic aesthetics;
- Ultra-slim sleek design, stylish and classic;
- Reflector and heat sink integrated;
- Pure aluminum structure for heat dissipation, professional optical design;
- Luminous efficiency is increased by 50%.
- High efficiency: 120lm/w
- Cree/OSRAM/Philips chip Meanwell power
- Energy Saving: > 80%
- TUV CE RoHS FCC certificates
- 5 years warranty

Specification


Item Code	Wattage	Voltage	Lumens	Luminous efficiency	CCT/Colors	LED source	Beam angle	PF	Ra	IP Rating	Size mm	Boxed weight kg	Certificates	Warranty Period(years)
GV-FLB-10W	10W	AC85-265V	1200-1500LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	116x107x32	0.8kg/pcs	CE RHOS	5
GV-FLB-20W	20W	AC85-265V	2400-2800LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	216x152x40	1.2kg/pcs	CE RHOS	5
GV-FLB-30W	30W	AC85-265V	3600-4300LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	226x167x40	1.5kg/pcs	CE RHOS	5
GV-FLB-50W	50W	AC85-265V	6000-6200LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	310x220x50	3kg/pcs	CE RHOS	5
GV-FLB-80W	80W	AC85-265V	9600-10000LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	354x245x55	4.5kg/pcs	CE RHOS	5
GV-FLB-100W	100W	AC85-265V	12000-13000LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	402x295x60	7kg/pcs	CE RHOS	5
GV-FLB-150W	150W	AC85-265V	18000-19000LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	430x330x60	8.7kg/pcs	CE RHOS	5
GV-FLB-200W	200W	AC85-265V	24000-25000LM	120-150LM/W	2700K-7500K	Philips or Osram 3030 SMD	150°	>0.95	>80	IP65	470x360x60	9.8kg/pcs	CE RHOS	5



REFLECTOR AND HEAT SINK INTEGRATED

Large size aluminum PCB fit aluminum die cast housing, reflector and heat sink integrated

New design

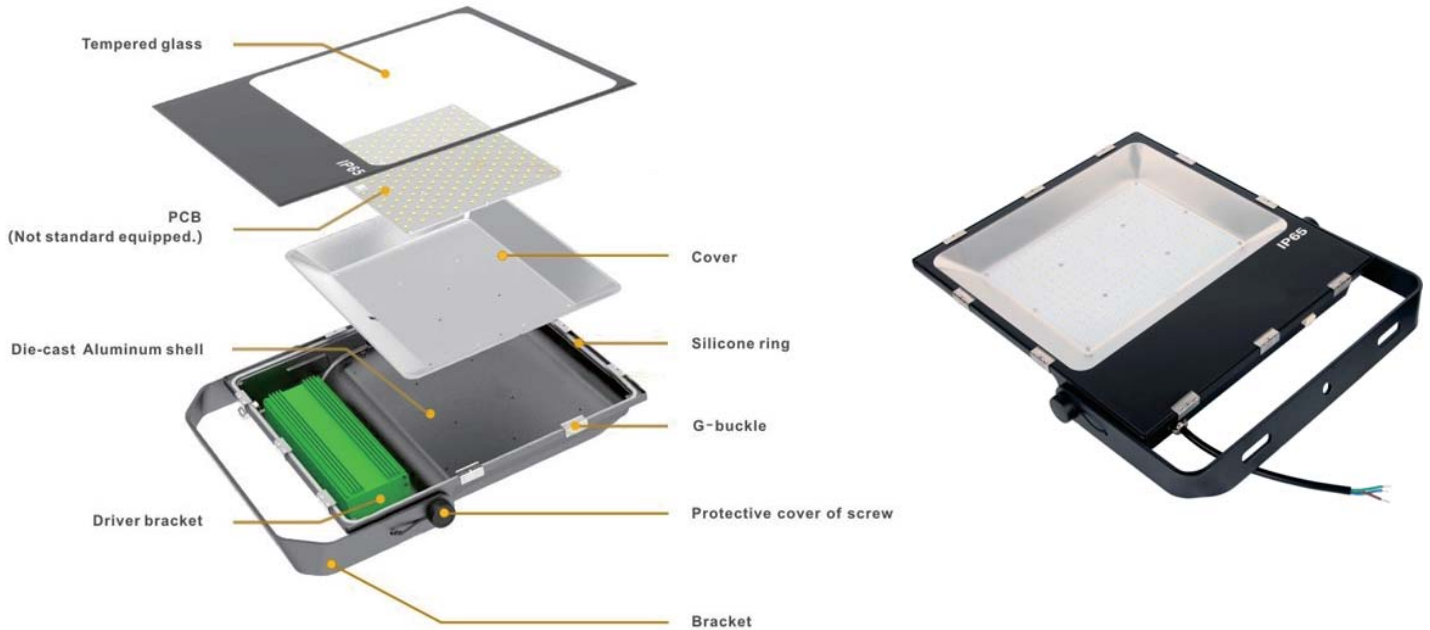

Applications



Led flood lights widely used in shopping mall, exhibition hall, parking lot, playground, gymnasium, billboards, park, sculpture, national green lighting project, building facade and public corridor, stair corridor and other indoor and outdoor lighting.

Packaging & Shipping

Standard export packing, color box or neutral white box
Within 3-7 days for samples, large order 15~25 working days after transfer



MINSENS 2017

Address: 2#, No.55, Baishazhou Road, Wuchang, Wuhan, CN
www.minsens.com www.minsens-led.com
Tel: +86 27 5148 2125
Fax: +86 27 5148 2255
Email: sales@minsens.com