

U series LED high bay light



Features

- OSRAM 3030 LED chip (or Philips 3030) with low attenuation.
- Super brightness and high efficiency
- Long lifespan 50,000 hours.
- Transparent glass or lens can be chosen.
- 2.0mm thick MPCB board (3.0 heat conductivity) fix on patent design heat sink. Good heat capacity and very good cooling..
- Super high lumens output, good color rendering, quick start, no glaring, and environment friendly.
- Easy to install: Bracket installation or suspension installation optional.
- Integrated PC lens with high temperature resistance, high strength, high light transmittance.

Specification

MS	60W	80W	100W	150W	200W
Model	MS-UHB-60W	MS-UHB-80W	MS-UHB-100W	MS-UHB-150W	MS-UHB-200W
LED Brand	OSRAM LED				
Beam Angle	60/90/120 degree				
IP Rate	IP66				
LED Qty.	133	133	133	210	350
Size	280x280x185mm	280x280x185mm	340x340x187mm	340x340x187mm	400x400x196mm
Ra	> 80	> 80	> 80	> 80	> 80
LED Driver	Meanwell				
Certification	CE RHOS FCC				
Warranty	5 Years Warranty				



New design

- Housing: With professional design, we insist on choose less aluminum to get max. heat dispersion performance, in order to reduce the total weight of i-Sun. This will reduce a lot of shipping cost and also be easier for electrician to install them.
- LED: Imported Nichia LED with high quality and light efficiency. Its long lifetime is also a big advantage than other brand LED chip.
- Driver : Meanwell is very famous in LED products application. We choose them because of its stable performance. Our customer don't need pay expensive cost to rent lifter to replace it.
- Material: Using the best material for spare parts, such as plastic lens, which pass IK08 anticollision test.
- Protection: IP66, best sealing which can better prevent from water and dust.

Applications




Applications available


- 1) workshop
- 2) factory
- 3) warehouse
- 4) highway toll stations
- 5) gas stations
- 6) exhibition halls
- 7) stadiums
- 8) packing lot
- 9) dock
- 10) other places of lighting required.

Various Installation Method


Surface Mount

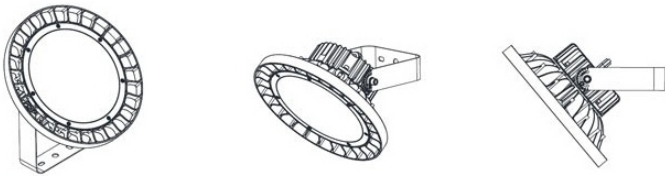

Chain Mount

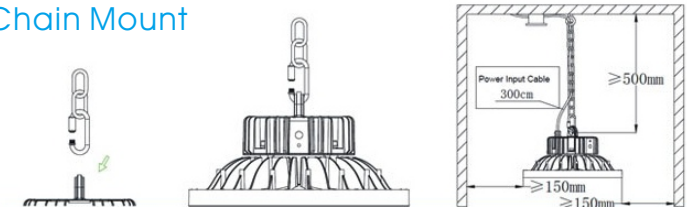

Pole Mount

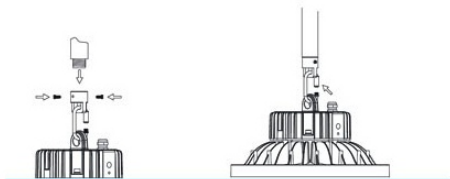

Packaging & Shipping

Standard export packing, color box or neutral white box

Within 7 days for samples, large order
15~25 working days after transfer

